

# PIPING SYSTEM

## PVC SERIES CONDUIT & FITTINGS




# PIPING SYSTEM




All BOSS Rigid PVC Conduit and Fittings are manufactured in strict accordance with the British Standard BSEN 61386 - 21:2004 / IEC 61386-21:2002. Fire Retardant and High Impact Polyvinyl Chloride is used to manufacture the conduit and Fittings.

Standard colours



**PIPING SYSTEM**  
Brochure  
Download

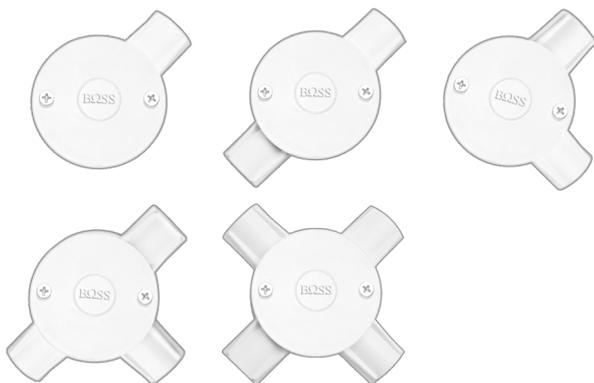

ORDER NO.	WE	BK	DESCRIPTION
<b>JUNCTION BOXES 20 mm</b> <i>with lids &amp; screw</i>			
B240/ 20/ 1	○	●	1 way
B240/ 20/ 2	○	●	2 way
B240/ 20/ 2A	○	●	2 way angle
B240/ 20/ 3	○	●	3 way
B240/ 20/ 4	○	●	4 way
<b>JUNCTION BOXES 25 mm</b> <i>with lids &amp; screw</i>			
B240/ 25/ 1	○	●	1 way
B240/ 25/ 2	○	●	2 way
B240/ 25/ 2A	○	●	2 way angle
B240/ 25/ 3	○	●	3 way
B240/ 25/ 4	○	●	4 way



ORDER NO.	WE	BK	DESCRIPTION
<b>CONDUIT</b>			
B9016	○	●	16 mm
B9020	○	●	20 mm
B9025	○	●	25 mm
B9032	○	●	32 mm




ORDER NO.	WE	BK	DESCRIPTION
<b>CORRUGATED CONDUIT</b>			
B9016 CM	○	●	16 mm
B9020 CM	○	●	20 mm
B9025 CM	○	●	25 mm
B9032 CM	○	●	32 mm

ORDER NO.	WE	BK	DESCRIPTION
<b>JOINING COUPLING</b>			
B242/ 16	○	●	16 mm
B242/ 20	○	●	20 mm
B242/ 25	○	●	25 mm
B242/ 32	○	●	32 mm



ORDER NO.	WE	BK	DESCRIPTION
<b>INSPECTION ELBOW</b>			
B244/ 16	○	●	16 mm
B244/ 20	○	●	20 mm
B244/ 25	○	●	25 mm
B244/ 32	○	●	32 mm



ORDER NO.	WE	BK	DESCRIPTION
<b>INSPECTION TEES</b>			
B246/ 20	○	●	20mm



ORDER NO.	WE	BK	DESCRIPTION
<b>90° BENDS</b>			
B247/ 16	○	●	16 mm
B247/ 20	○	●	20 mm
B247/ 25	○	●	25 mm
B247/ 32	○	●	32 mm



ORDER NO.	WE	BK	DESCRIPTION
<b>SADDLE</b>			
B261/ 16	○	●	16 mm
B261/ 20	○	●	20 mm
B261/ 25	○	●	25 mm
B261/ 32	○	●	32 mm

ORDER NO.	WE	BK	DESCRIPTION
<b>SPACER</b>			
B261 S	○	●	All size



ORDER NO.	WE	BK	DESCRIPTION
<b>CONDUIT CLIP</b>			
B280/ 16	○	●	16 mm
B280/ 20	○	●	20 mm
B280/ 25	○	●	25 mm
B280/ 32	○	●	32 mm



ORDER NO.	WE	BK	DESCRIPTION
<b>SCREWED COUPLING</b>			
B258/ 16	○	●	16 mm
B258/ 20	○	●	20 mm
B258/ 25	○	●	25 mm
B258/ 32	○	●	32 mm




ORDER NO.	WE	BK	DESCRIPTION
<b>MALE BUSHES</b>			
B281/ 16	○	●	16 mm
B281/ 20	○	●	20 mm
B281/ 25	○	●	25 mm
B281/ 32	○	●	32 mm



ORDER NO.	WE	BK	DESCRIPTION
<b>GLANDS</b>			
B279 C20	○	●	20 mm

LIDS JUNCTION BOXES

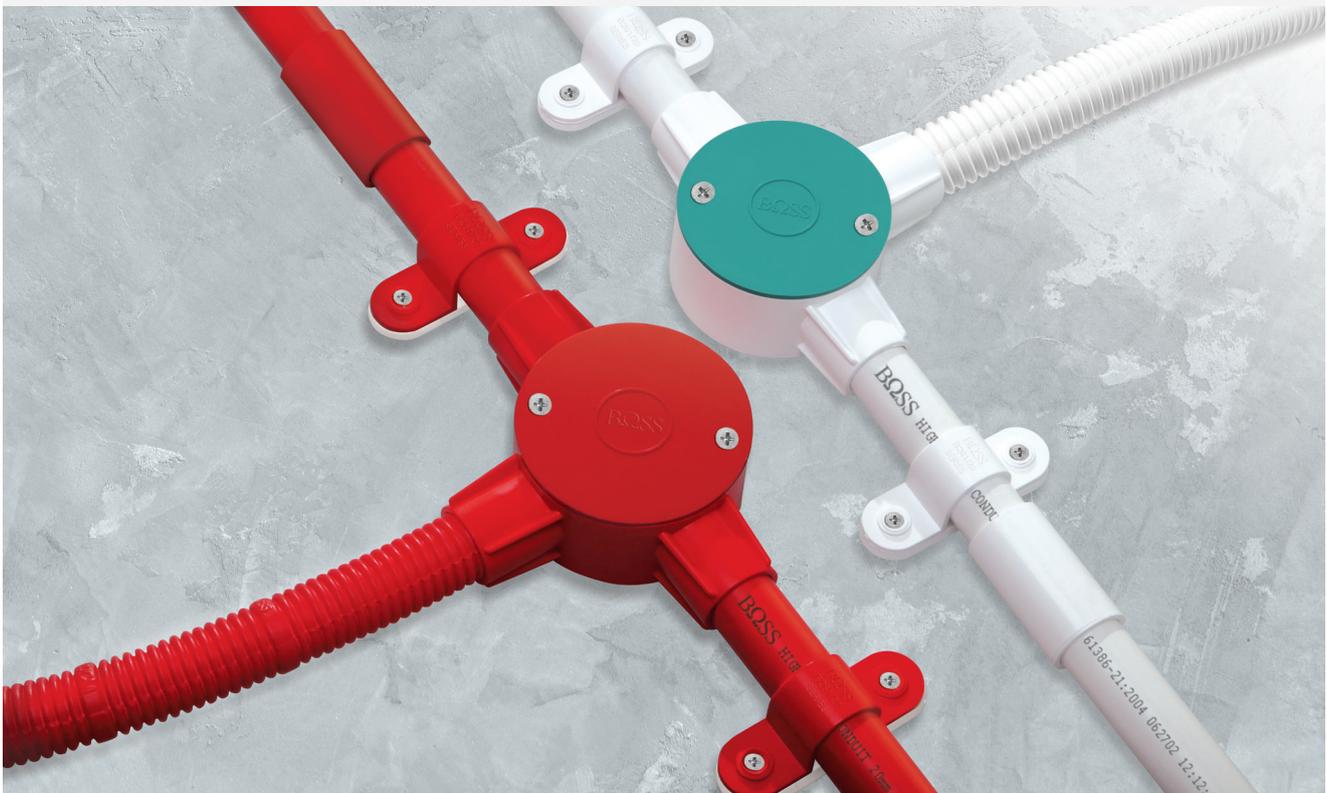

ORDER NO.	RD	OR	YW	GR	BL	DESCRIPTION
<b>JUNCTION BOXES 20 mm</b>						
<i>with lids &amp; screw</i>						
B240/ 20/ 1	—	—	—	—	—	1 way
B240/ 20/ 2	●	●	●	●	●	2 way
B240/ 20/ 2A	—	—	—	—	—	2 way angle
B240/ 20/ 3	●	●	●	●	●	3 way
B240/ 20/ 4	—	—	—	—	—	4 way

<b>LIDS JUNCTION BOXES</b>						
B240L	●	●	●	●	●	

Sample of application



ORDER NO.	RD	OR	YW	GR	BL
<b>CONDUIT 20 mm</b>					
B9020	●	●	●	●	●
<b>CORRUGATED CONDUIT 20 mm</b>					
B9020 CM	●	●	●	●	●
<b>JOINING COUPLING 20 mm</b>					
B242/ 20	●	●	●	●	●
<b>SADDLE 20 mm</b>					
B261/ 20	●	●	●	●	●

\* Minimum Quantity may apply. Custom colour are available upon request.

\*\* The colours shown above are simulated colour. The actual colour may differ, please contact our marketing for a colour sample and availability.

# PIPING SYSTEM

## PVC SERIES CONDUIT & FITTINGS

